



HOSHIZAKI

Flaker/Flockeneisbereiter/Machines A Glace EN Paillettes
Schilferijsmachines/Fabbricatori Di Ghiaccio in scaglie


FM series / CM series

FM series




Flake(Nugget) ice
Flocken(Nugget)eis
Paillettes(Pepites)
Schilfer(Nugget)ijs
Scaglie(Nugget)


FM-80EE




FM-120EE




FM-120EE-50

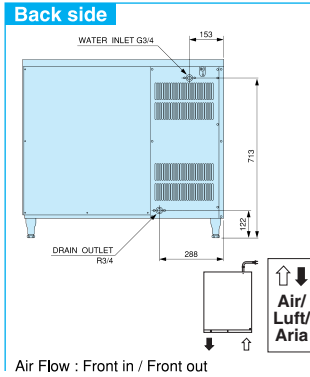


FM-251AFE w/B-300bin

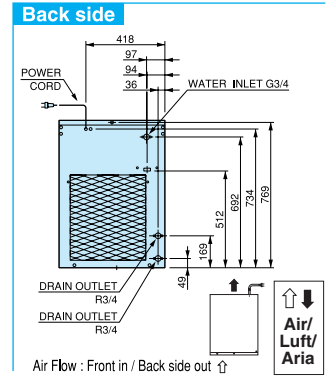

FM-600AHE w/B-300bin

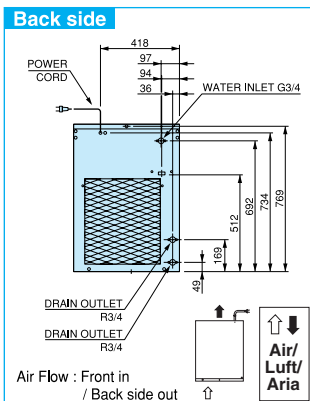

FM-1000ASFE3 w/B-900bin

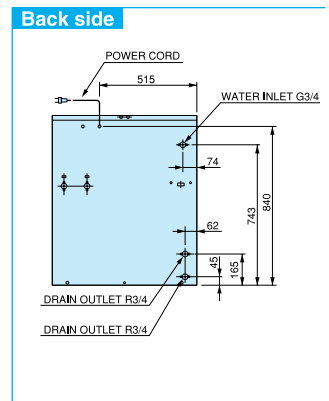


CM series



Cubelet/Cubelets
Cubelets/Cubeletijs
Ghiaccio in cubelet

CM-110EE

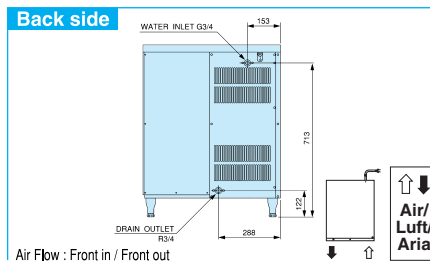

FM


Flake(Nugget) ice
Flocken(Nugget)eis
Paillettes(Pepites)
Schilfer(Nugget)ijs
Scaglie(Nugget)



FM251AFE
W/B-300bin

CM

Cubelet
Cubeleteis
Cubelets
Cubeletijs
Ghiaccio in cubelet



CM-110EE

		FM80EE	FM120EE FM120EE-N	FM120EE-50 FM120EE-50N	FM251AFE FM251AFE-N	FM600AHE FMN440AHE	FM600AWHE FMN440AWHE	FM1000ASF3 FM1000ASF3-N	CM110EE
Ice Production(kg/day)	Type of ice	Flake	Flake Nugget	Flake Nugget	Flake Nugget	Flake Nugget	Flake Nugget	Flake Nugget	Cubelet
Eisproduktion(Kg/24 Std.)									
Production en 24h	A.T. 10°C W.T. 10°C	85	125 110	125 110	246 236	600 440	600 440	1020 850	110
IJsproductie(Kg/24uur)									
Produzione in 24h	A.T. 21°C W.T. 15°C	75	115 98	115 98	200 192	540 420	560 415	950 800	98
Bin Capacity (kg)									
Vorrat(kg)									
Reserve		26	26	57	—	—	—	—	32
Opslag									
Riserva									
Cooling System									
Kühlung	A=Air/Luft/ Lucht/Aria								
Condenseur	AR=Remote/Separat/ Distance	A	A	A	A	A	W	AR	A
Condensator	W=Water/Wasser/ Water/Acqua/Eau							(URC 20)	
Raffreddamento									
Refrigerant									
Kältemittel									
Fluide Refrigerant		R134a	R134a	R134a	R404A	R404A	R404A	R404A	R134a
Koelmedium									
Refrigerante									
Electrical Supply									
Netzspannung					1/220-240			1/380	1/220-240
Alimentation électrique					50Hz			50Hz	50Hz
Spanning									
Voltage Standard									
Electrical Consumption (W/h)									
Anschlussleistung(W/h)									
Consommation électrique(W/h)		300	520	520	830	1920 1970	1670 1850	3210	525
Stroomverbruik(W/h)									
Consumo Elettrico(W/h)									
Water Consumption (lit/h)									
Wasserverbrauch(Ltr/Std.)									
Consommation D'Eau(lit./h)		2.5	4.8	4.8	8.5	22.9	129.1	40	4.1
Waterverbruik(lit./uur)									
Consumo Acqua(lit./h)									
Dimensions (mm)									
Abmessungen(BxTxH)		W640	W940	W940	W560	W560	W560	W765	W640
Dimension(LxPxH)		x	x	x	x	x	x	x	x
Maten(BxDxH)		D600	D600	D600	D700	D700	D700	D698	D600
Dimensioni(LxPxH)		x	x	x	x	x	x	x	x
Finishing									
Ausführung	S/S=Stainless steel/ Chromnickelstahl/ Inox/Roestvrijstaal/ Acciaio								
Carrosserie									
Behuizing									
Finitura									
Weight (kg) Net/Gross									
Gewicht Netto/Brutto									
Poids Net/Brut		65/75	71/82	81/94	86/98	110/122	110/122	153/168	71/82
Gewicht Netto/Bruto									
Peso netto/Lordo									

Hoshizaki Europe BV

Lemelerbergweg 51 1101 AM Amsterdam, The Netherlands
TEL: +31 (0)20 6918499, FAX: +31 (0)20 6918768
www.hoshizaki.com

Hoshizaki UK

2 Marquis Business Centre, Royston Road, Baldock, Hertfordshire, SG7 6XL, U.K.
TEL: 0845 456 0585, FAX: 01462 499080

Hoshizaki France

Paris Nord 2, 13, Rue de la Perdrix, BP 44072 Tremblay en France
95913 Roissy Charles de Gaulle Cedex, France
TEL: 01 48 63 93 80, FAX: 01 48 63 93 88

Hoshizaki Deutschland

Siemensring 98, 47877 Willich-Münchheide I, Germany
TEL: 02154/92810, FAX: 02154/928128

Hoshizaki Belgium

Ikaros Business Park, Ikaroslaan 6, 1930 Zaventem, Belgium
TEL: 02 712 30 30, FAX: 02 712 30 31

**Operating limits/Max.Betriebsgrenzen/
Limites de fonctionnement/Conditioes/Condizioni**

(A.T.): 5 - 40°C

(W.T.): 5 - 35°C

: 0.5 - 8 bar